

Inspiring
Great
Spaces™

Armstrong[®]
FLOORING
COMMERCIAL



ACCOLADE PLUS ACCOLADE SAFE WALLFLEX

COMMERCIAL FLOORING & WALLING
HOMOGENOUS VINYL SHEET

*VIVES
MEJOR!*

 **tecnopor** S.A.

ACCOLADE PLUS

(2mm x 1.83m x 16m)



P3*

X*

R10*


SLIP RESISTANCE




MANDARINE



SOFT SUN

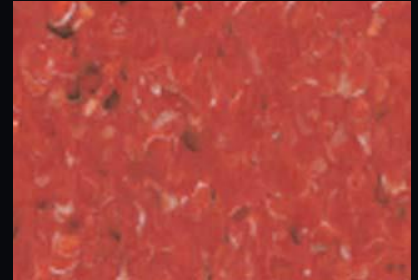

BANKSIA RED

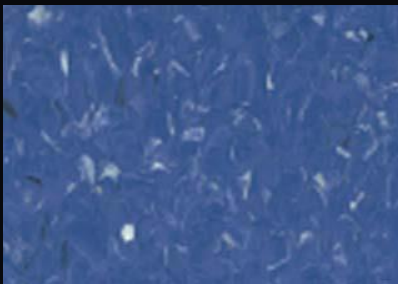

MISTY BLUE



LEAF GREEN



Variations may occur between photographic images, samples and batches in terms of colour, shade, pattern or similar.

ACCOLADE PLUS

(2mm x 1.83m x 16m)



P3*

X*

R10*

SLIP RESISTANCE



SPICE WHITE



CAPPUCCINO



IRONBARK



WHITEHAVEN



DARLING GREY



MURRAY CLAY



CEDUNA WHITE



SAND GREY



BLACK OPAL



STERLING GREY



NAPIER GREY



BLACK ROCK

Variations may occur between photographic images, samples and batches in terms of colour, shade, pattern or similar.


ACCOLADE PLUS

(2mm x 1.83m x 16m)

P3* X* R10* SLIP RESISTANCE



BONDI SAND

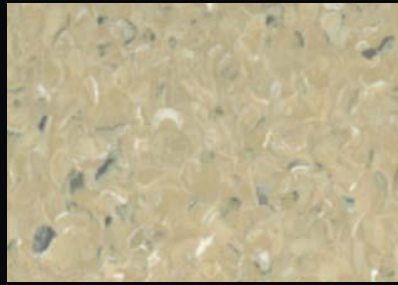

CAPRICORN BEIGE



CITRUS YELLOW




KALGOORLIE GOLD



CARNARVON RED



BYRON BLUE

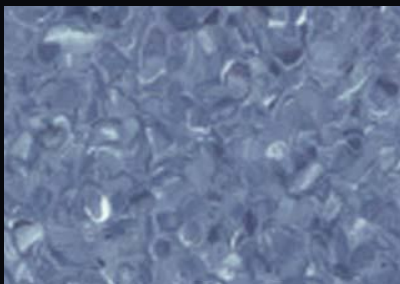

BELLS BLUE



SORRENTO BLUE



WHITSUNDAY BLUE



LEMONGRASS



DAINTREE GREEN



Variations may occur between photographic images, samples and batches in terms of colour, shade, pattern or similar.



Armstrong Flooring's Infinity system allows you to pick any existing Accolade Plus or Accolade Safe product and add up to two chip colours to create your own unique visual*.

Accolade Plus or Accolade Safe



Colour Chips




53313
PMS: Warm Gray 5 C



53314
PMS: Cool Gray 10 C

Infinity

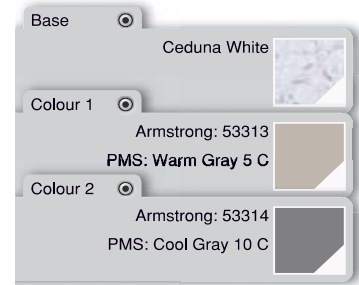

Accolade Base Colour: Ceduna White

Customised Infinity Design

*Minimum order quantities apply. Contact your Sales Representative or call 1800 632 624 for more information.



Royal Children's Hospital, Melbourne



ACCOLADE SAFE

(2mm x 1.83m x 16m)

P4* W* R10* SLIP RESISTANCE



SPICE WHITE




CAPPUCCINO



IRONBARK



WHITEHAVEN

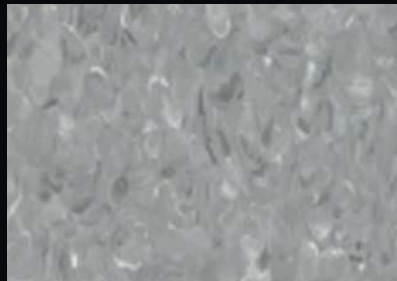

DARLING GREY



MURRAY CLAY



CEDUNA WHITE



SAND GREY



BLACK OPAL



STERLING GREY



NAPIER GREY



BLACK ROCK

Variations may occur between photographic images, samples and batches in terms of colour, shade, pattern or similar.


ACCOLADE SAFE

(2mm x 1.83m x 16m)

P4* W* R10* SLIP RESISTANCE



BONDI SAND

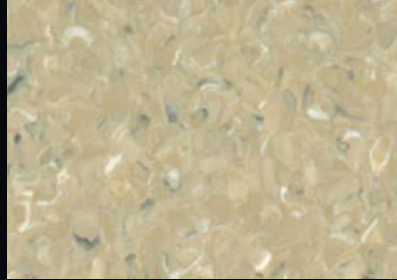

CAPRICORN BEIGE



CITRUS YELLOW




KALGOORLIE GOLD



CARNARVON RED



BYRON BLUE

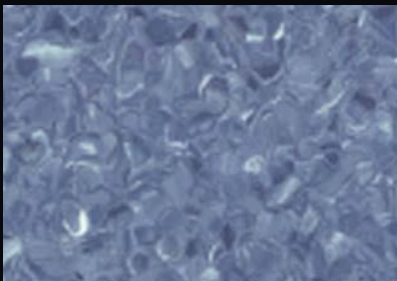

BELLS BLUE



SORRENTO BLUE



WHITSUNDAY BLUE



LEMONGRASS




DAINTREE GREEN



Variations may occur between photographic images, samples and batches in terms of colour, shade, pattern or similar.

WALLFLEX


(1.25m x 1.5m x 20m)

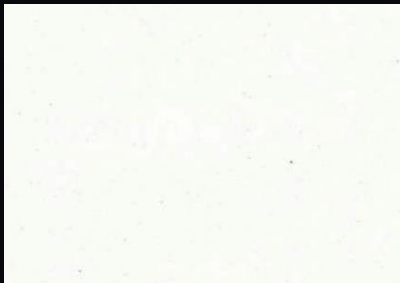


DOVE WHITE



BLUE HARMONY

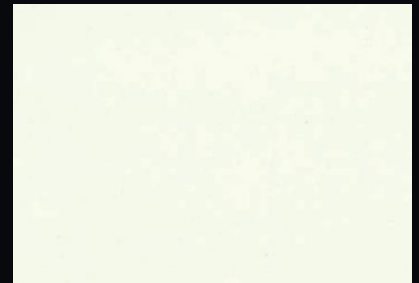


ACID GREEN

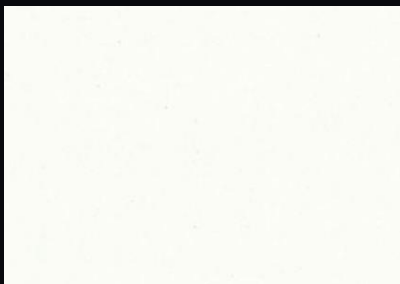

NEUTRAL WHITE




ICE WHITE

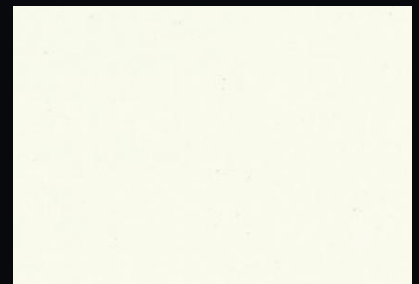


LINEN



COOL WHITE

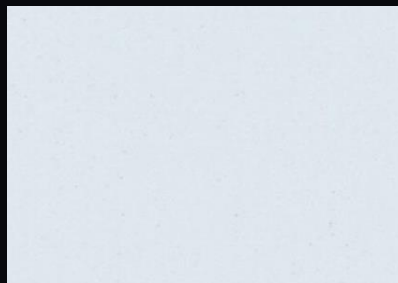

BLUE GREY

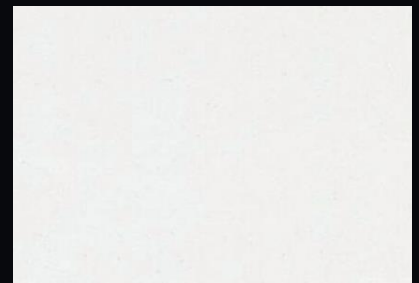

MUSHROOM



ALABASTER

WALLFLEX

(2mm x 1.5m x 20m)



Variations may occur between photographic images, samples and batches in terms of colour, shade, pattern or similar.




Lady Cilento Children's Hospital, Brisbane





Infinity Custom allows you to create your own customised flooring and walling products based on our Accolade Plus, Accolade Safe and Wallflex formulations*

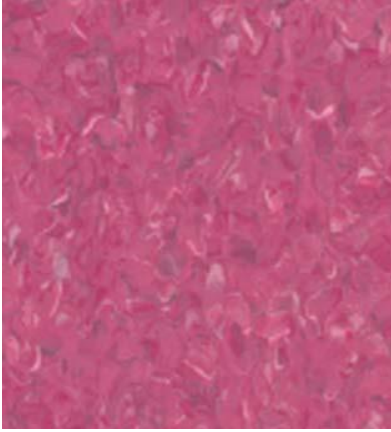

*Minimum order quantities apply. Contact your Sales Representative or call 1800 632 624 for more information.



Lady Cilento Children's Hospital, Brisbane



ACCOLADE PLUS

ACCOLADE SAFE

WALLFLEX

Practical

- Exclusive homogeneous formulation including replenishing polyurethane throughout the thickness of the floor.
- Protective polyurethane finish reduces initial and ongoing maintenance and increases scuff resistance.

- Offers supreme safety without the impregnated silicon chips of conventional non-slip resistant flooring that can attract and hold dirt, increasing maintenance and wear and tear on cleaning equipment.
- Unique construction with highly accented jaspe (multi-colour chip) visual helps mask dirt and wear patterns.

- Polyurethane coating aids maintenance.
- Clean, simple design for an uncomplicated look or the addition of a frieze if desired.
- 1.5 metre width ideal dado height for ease of installation.

Durable

- Homogeneous construction for excellent dent and gouge resistance.
- The embossed surface texture and highly accented jaspe (multi-colour chip) visual help hide dirt and wear patterns created in high traffic conditions.

- The embossed surface reduces aquaplaning, while aiding slip resistance.




- Polyurethane coating reduces maintenance costs and protects long term appearance.
- Homogeneous construction for excellent dent and gouge resistance.

Applications

- Hospital
- Aged Care
- Health Care
- Education
- Light Industrial
- Mercantile
- Hospitality

- Hospital
- Aged Care
- Health Care
- Education
- Light Industrial
- Mercantile
- Hospitality

- Hospital
- Aged Care
- Health Care
- Education
- Light Industrial
- Mercantile
- Hospitality

TECHNICAL DATA		ACCOLADE PLUS	ACCOLADE SAFE	WALLFLEX	WALLFLEX
Type of floor covering/wall covering	EN 649	Homogeneous sheet vinyl	Homogeneous sheet vinyl	Homogeneous sheet vinyl	Homogeneous sheet vinyl
Manufactured in		Australia	Australia	Australia	Australia
Overall Thickness	EN 428	2.0mm	2.0mm	1.25mm	2.0mm
Wear Layer thickness	EN 429	2.0mm	2.0mm	1.25mm	2.0mm
Roll dimensions	EN 426	1.83m x 16m	1.83m x 16m	1.5m x 20m	1.5m x 20m
Polyurethane Reinforced		Yes PUR	No	Yes PUR	Yes PUR
Wear resistance	EN 660-2	Group T	Group P		
Slip Resistance	AS 4586				
Appendix A: Wet pendulum		P3(X)*	P4(W)*	N/A	N/A
Appendix C: Wet/barefoot ramp			B*		
Appendix D: Oil-wet ramp		R10*	R10*		
Fire Resistance	ISO 9239-1				
Critical Radiant Flux		≥11kW/m ²	≥11kW/m ²	N/A	N/A
Smoke Development Rate		≤750%. minutes	≤750%. minutes		
Fire Resistance	AS/NZS 3837				
Cone Calorimeter		Group 3	Group 3	Group 2	Group 1
Average specific extinction area		<250m ² /kg	<250m ² /kg	<250m ² /kg	<250m ² /kg
Classification (Use Area)	EN ISO 10874	Commercial: 34 	Commercial: 34 	N/A	N/A
		Commercial: 43 	Commercial: 43 	N/A	N/A

* Minimum order quantities apply. Contact your Sales Representative or call 1800 632 624 for more information.

Visit www.armstrongflooring.com.au or contact Customer Service 1800 632 624 for technical data, installation, cleaning and maintenance instructions.

